

EV-122C-DVC3 IR Mini Vandal Color Dome

EV-122C-VWA3 Mini Vandal Color Dome

Features:

- ▶ SECO-LARM's IR and standard mini vandal-resistant weatherproof dome cameras feature a multi-axis gimbal mount allowing 360° rotation and a 10°~120° tilt, enabling a variety of installation options.
- ▶ Both cameras use a 1/3" Sony CCD with a 3.6mm lens for a clear picture, while a resolution of 420 TV lines offers superior picture quality.
- ▶ The vandal-resistant case's unique design and O-ring-sealed base make it weatherproof.
- ▶ The EV-122C-DVC3 has 21 IR LEDs for a 50' (15m) range, while a rubber lens hood helps reduce IR reflection.
- ▶ Additional features include Automatic Electronic Shutter, Gain Control, and White Balance.



EV-122C-DVC3

Up to 50'




EV-122C-VWA3

Specifications:

	EV-122C-DVC3	EV-122C-VWA3
Type	Mini IR Vandal Color Dome	Mini Vandal Color Dome
Number of IR LEDs	21	N/A
Maximum LED Range	Up to 50' (15M)	N/A
Minimum Illumination	0.4 Lux (LEDs off) 0.0 Lux (LEDs on)	0.4 Lux
Power Consumption	350mA (LEDs on) 120mA (LEDs off)	120mA
Power Source	12 VDC ± 10%	
Sensor	1/3" Sony CCD	
Resolution	420 TV Lines	
Sync	Internal	
Video Output	1V pp Composite Output, 75 Ohms	
Lens (F2.0)	3.6mm lens	
White Balance	Automatic	
Gamma Correction	0.45	
S/N ratio	>48dB	
Shutter Control	Auto 1/60 ~ 1/100,000	
Gain Control	Auto	
Enclosure	IP66 Weatherproof	
Operating temperature	14°-122° F (-10°-50° C)	
Dimensions	4 1/4" X 3" (108 X 76mm)	
Weight	0.9 lbs. (405g)	0.8 lbs. (365g)



Dimensions:

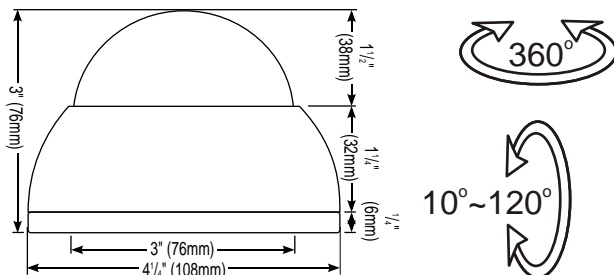

Copyright 2008 SECO-LARM U.S.A., Inc. All rights reserved.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.